



THERMOWOOD®

# PROTECTED BY NATURE



## PROFIELEN | PROFILÉS | PATTERNS

V4 2023

# LDCWOOD® THERMOWOOD®

LDCwood® biedt een oplossing voor elke behoefte met een breed assortiment aan houtsoorten en profielen. LDCwood® ThermoWood® kan onder vacuümdruk brandvertragend worden behandeld, voorvergrijsd, geolied, geborsteld en gelakt.

**Ons lidmaatschap bij de International ThermoWood® Association garandeert de hoogste kwaliteit van thermisch gemodificeerd hout. Met hout uit duurzaam beheerde bossen houdt niets je tegen om voor LDCwood® ThermoWood® te kiezen.**

LDCwood® offre une solution pour chaque besoin en proposant une large gamme de types de bois et de modèles. LDCwood® ThermoWood® peut être traité avec un produit ignifuge par pression sous vide, prévieilli, huilé, brossé et verni.

**Notre adhésion à l'Association Internationale ThermoWood® garantit la plus haute qualité du bois réifié thermiquement. Notre bois provient de forêts gérées durablement. Dès lors, LDCwood® ThermoWood® est le choix qui s'impose, quelles que soient les quantités requises.**

LDCwood® provides a solution for every need with a wide range of wood types and patterns. LDCwood® ThermoWood® can be treated with fire retardant under vacuum pressure, pre-aged, oiled, brushed and varnished.

**Our membership in the International ThermoWood® Association guarantees the highest quality of thermally modified timber. With wood from sustainable managed forests there are no boundaries to choose LDCwood® ThermoWood®.**



Onderhoudsvriendelijk  
Facile à entretenir  
Easy to maintain



Hout uit duurzaam beheerde bossen  
Bois de forêts gérées durablement  
Wood from sustainable managed forests




Lange levensduur tot 25 jaar (EN 350-1)  
Longue durée de vie jusqu'à 25 ans (EN 350-1)  
Long lifespan up to 25 years (EN 350-1)



Gecertificeerde brandvertragende behandeling in eigen beheer  
Traitement ignifuge interne certifié  
Certified in-house fire retardant treatment



FSC® (C001899), PEFC (PEFC/07-31-24), BSI ISO 14001 Certified

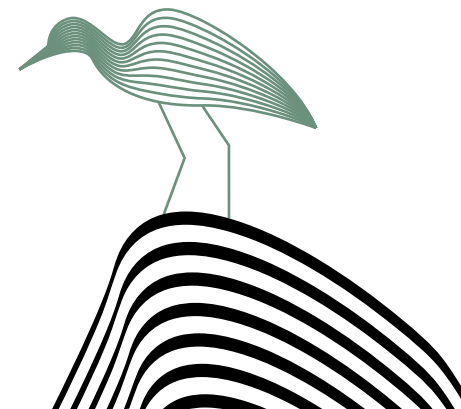

# PROTECTED BY NATURE

## Onze filosofie

Als je LDCwood® ThermoWood® gebruikt, help je de natuur te beschermen. Je steunt duurzaam bosbeheer en kiest voor een bouw materiaal met een kleine ecologische voetafdruk. Meer nog: net zoals LDCwood® ThermoWood® de natuur beschermt, beschermt de natuur ons. Ongeacht de weersomstandigheden biedt LDCwood® ThermoWood® een langdurige bescherming tegen de elementen en staat het garant voor een ongelooflijk hoge duurzaamheid. Je zou dus kunnen stellen dat de natuur onze manier van leven beschermt.

## Notre philosophie

Lorsque vous utilisez des matériaux fournis par LDCwood®, vous contribuez à la protection de la nature. Vous soutenez en effet la gestion durable des forêts et vous choisissez un matériau de construction dont l'empreinte écologique est faible. Mais cela ne s'arrête pas là. Tout comme LDCwood® protège la nature, la nature nous protège. Quelles que soient les conditions météorologiques, LDCwood® ThermoWood® offre une protection à long terme contre les éléments et fait preuve d'une durabilité incroyablement élevée. C'est comme si la nature faisait office de bouclier protecteur de notre mode de vie.

## Our philosophy



When you use LDCwood® ThermoWood®, you contribute to protecting nature. You are supporting sustainable forest management and choosing a building material with a low carbon footprint. But even more, just as LDCwood® ThermoWood® protects nature, nature protects us. Whatever the weather conditions, LDCwood® ThermoWood® offers long-term protection from the elements, and demonstrates incredibly high durability. As such, one could say that nature acts as a guardian for our way of life.



# ALKE

**Afrika - Afrique - Africa**

- Rotbestendig
- Résistant à la pourriture
- Rot resistant
- Milieuvriendelijk
- Respectueux de l'environnement
- Earth-friendly
- Vormvast
- Dimensionnellement stable
- Dimensionally stable
- Duurzaamheidsklasse I-II
- Classe de durabilité I-II
- Durability class I-II

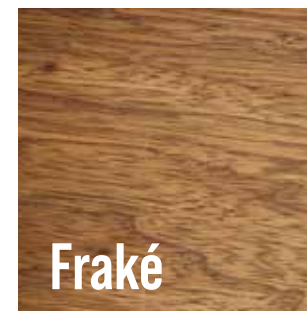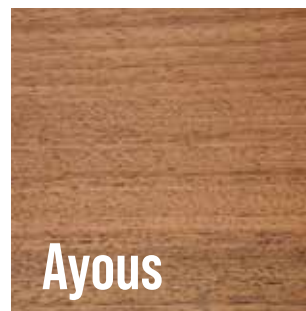

# Thermo-D Ayous

| Duurzaamheidsklasse 1 / Classe de durabilité 1 / Durability class 1


|||| gevel / bardage / cladding

🏠 interieur / intérieur / interior

☁️ outdoor / extérieur / outdoor

🪵 terras / planches de terrasse / decking


🔥 kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant



**PARA**

18 x 68 mm


ThermoWood® Ayous



**OLLA\*\***

15 x 142 [131] mm


ThermoWood® Ayous



**NOLA**

18 x 120 [105] mm


ThermoWood® Ayous



**EDEA**

21 x 126 [115] mm

ThermoWood® Ayous



**MORA**

21 x 142 [131] mm


ThermoWood® Ayous



**BANA**

21 x 170 [159] mm


ThermoWood® Ayous



**ELSA (KITE)**

20 x 142 [132] mm

ThermoWood® Ayous



**RIB4**

21 x 115 [107] mm

ThermoWood® Ayous



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | protectedbynature@ldcwood.com  
www.ldcwood.com

\*\* kan 4-zijdig worden voorzien van T&G

\*\* peut être équipé de rainures et de languettes sur les 4 côtés

\*\* can be equipped with tongue and groove on all 4 sides

\* mits aanpassing naar 15 mm dikte op dunste deel

\* à condition qu'il soit ajusté à une épaisseur de 15 mm au niveau de la partie la plus fine

\* provided it is adjusted to a thickness of 15 mm at the thinnest part.

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Thermo-D Ayous

| Duurzaamheidsklasse 1 / Classe de durabilité 1 / Durability class 1

|||| gevel / bardage / cladding

☁ outdoor / extérieur / outdoor



kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant


🏠 interieur / intérieur / interior

☀ terras / planches de terrasse / decking




## RIB5

21 x 141,7 (133,7) mm  
ThermoWood® Ayous




## RIB6

21 x 168 (160) mm  
ThermoWood® Ayous




## ZAZA

21 X 168 (155) mm  
ThermoWood® Ayous



## BELO

34 x 121 (105) mm  
ThermoWood® Ayous




## BOGO (OSLO)

34 x 143,5 (127,5) mm  
ThermoWood® Ayous




## FARO (BODO)

34 x 186,1 (170) mm  
ThermoWood® Ayous

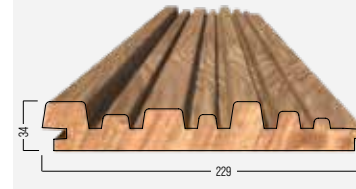

## SKYLINE 1

34 x 229 (213) mm  
ThermoWood® Ayous



## SKYLINE 2

55 x 71 (54) mm  
ThermoWood® Ayous



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Thermo-D Ayous

| Duurzaamheidsklasse 1 / Classe de durabilité 1 / Durability class 1


|||| gevel / bardage / cladding

🏠 interieur / intérieur / interior

☁️ outdoor / extérieur / outdoor

🪵 terras / planches de terrasse / decking

🔥 kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant




**WAVES 1**  
34 x 170 (160) mm  
ThermoWood® Ayous

- 🔥
- ||||
- ☁️
- 🏠
- 🪵




**WAVES 2**  
34 x 170 (160) mm  
ThermoWood® Ayous

- 🔥
- ||||
- ☁️
- 🏠
- 🪵




**WAVES 3**  
22 x 170 (160) mm  
ThermoWood® Ayous

- 🔥
- ||||
- ☁️
- 🏠
- 🪵




**INTERIOR 1**  
22 x 45 mm  
ThermoWood® Ayous

- ||||
- ☁️
- 🏠
- 🪵




**INTERIOR 2**  
22 x 45 mm  
ThermoWood® Ayous

- ||||
- ☁️
- 🏠
- 🪵



**INTERIOR 3**  
22 x 90 mm  
ThermoWood® Ayous

- ||||
- ☁️
- 🏠
- 🪵



**INTERIOR 4**  
22 x 90 mm  
ThermoWood® Ayous

- ||||
- ☁️
- 🏠
- 🪵



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Thermo-D Fraké

II Duurzaamheidsklasse 2 / Classe de durabilité 2 / Durability class 2

|||| gevel / bardage / cladding

☁ outdoor / extérieur / outdoor



kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant

🏠 interieur / intérieur / interior

☀️ terras / planches de terrasse / decking

**EDEA**  
21 x 126 mm (115)  
ThermoWood® Fraké

||||  
☁  
🏠  
☀️

**MORA**  
21 x 142 mm (131)  
ThermoWood® Fraké

||||  
☁  
🏠  
☀️

**BANA**  
21 x 170 mm (159)  
ThermoWood® Fraké

||||  
☁  
🏠  
☀️

**STORM 1**  
20,5 x 140 mm  
ThermoWood® Fraké

||||  
☁  
🏠  
☀️

**STORM 2**  
20,5 x 165 mm  
ThermoWood® Fraké

||||  
☁  
🏠  
☀️

**STORM 3**  
20,5 x 225 mm  
ThermoWood® Fraké

||||  
☁  
🏠  
☀️

**SKYLINE 1**  
34 x 229 (213) mm  
ThermoWood® Fraké

||||  
☁  
🏠  
☀️

**SKYLINE 2**  
55 x 71 (54) mm  
ThermoWood® Fraké

||||  
☁  
🏠  
☀️



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Thermo-D Fraké

II Duurzaamheidsklasse 2 / Classe de durabilité 2 / Durability class 2

|||| gevel / bardage / cladding


☁ outdoor / extérieur / outdoor



kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant

🏠 interieur / intérieur / interior

☀️ terras / planches de terrasse / decking



**GODO**  
34 x 83 mm (70)  
ThermoWood® Fraké

- II
- ☁
- ||||
- ☁
- 🏠
- ☀️



**WAVES 1**  
34 x 170 (160) mm  
ThermoWood® Fraké

- II
- ☁
- ||||
- ☁
- 🏠
- ☀️




**WAVES 2**  
34 x 170 (160) mm  
ThermoWood® Fraké

- II
- ☁
- ||||
- ☁
- 🏠
- ☀️




**WAVES 3**  
22 x 170 (160) mm  
ThermoWood® Fraké

- II
- ☁
- ||||
- ☁
- 🏠
- ☀️




**INTERIOR 1**  
22 x 45 mm  
ThermoWood® Fraké

- II
- ☁
- ||||
- ☁
- 🏠
- ☀️




**INTERIOR 2**  
22 x 45 mm  
ThermoWood® Fraké

- II
- ☁
- ||||
- ☁
- 🏠
- ☀️



**INTERIOR 3**  
22 x 90 mm  
ThermoWood® Fraké

- II
- ☁
- ||||
- ☁
- 🏠
- ☀️



**INTERIOR 4**  
22 x 90 mm  
ThermoWood® Fraké

- II
- ☁
- ||||
- ☁
- 🏠
- ☀️



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Thermo-D Fraké

II Duurzaamheidsklasse 2 / Classe de durabilité 2 / Durability class 2


|||| gevel / bardage / cladding

☁ outdoor / extérieur / outdoor

🔥 kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant

🏠 interieur / intérieur / interior

🌳 terras / planches de terrasse / decking



II

**DECKING 1**  
21 x 145 mm  
ThermoWood® Fraké


||||  
☁  
🏠  
🌳



II

**DECKING 2**  
27 x 145 mm  
ThermoWood® Fraké


||||  
☁  
🏠  
🌳



II

**DECKING 3**  
21 x 140 mm  
ThermoWood® Fraké


||||  
☁  
🏠  
🌳



II

**DECKING 4**  
21 x 140 mm  
ThermoWood® Fraké

||||  
☁  
🏠  
🌳



II

**DECKING 5**  
21 x 140 mm  
ThermoWood® Fraké

||||  
☁  
🏠  
🌳



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Ongeschaafd - brut - rough sawn

## Ayous


LDCwood® ThermoWood®  
Thermo-D



Breedte Largeur Width	Dikte Épaisseur Thickness
105 > 330 mm	20 > 105 mm
360 > 410 mm	20 > 105 mm

## Fraké

LDCwood® ThermoWood®  
Thermo-D



Breedte Largeur Width	Dikte Épaisseur Thickness
-	27 mm*
105 > 205 mm	40 > 80 mm
240 > 360 mm	40 > 80 mm

### Opmerking / remark / remarque:

- \* Af te nemen in assortiment van breedtes
- \* Sous réserve d'assortiments de largeurs
- \* Subject to width assortments



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.




# LAGOM

## Scandinavië - Scandinavie - Scandinavia

- Rotbestendig
- Résistant à la pourriture
- Rot resistant
- Milieuvriendelijk
- Respectueux de l'environnement
- Earth-friendly
- Vormvast
- Dimensionnellement stable
- Dimensionally stable
- Duurzaamheidsklasse I-II
- Classe de durabilité I-II
- Durability class I-II



Pine



Spruce

# Thermo-D Pine

| Duurzaamheidsklasse 1 / Classe de durabilité 1 / Durability class 1

|||| gevel / bardage / cladding


☁ outdoor / extérieur / outdoor



kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant


🏠 interieur / intérieur / interior

☀️ terras / planches de terrasse / decking




**PARA**  
18 x 68 mm  
ThermoWood® Pine

||||  
☁  
🏠  
☀️




**ALTA**  
18 x 142 [131] mm  
ThermoWood® Pine

||||  
☁  
🏠  
☀️




**MORA**  
21 x 142 [131] mm  
ThermoWood® Pine

||||  
☁  
🏠  
☀️




**ELSA (KITE)**  
20 x 142 [132] mm  
ThermoWood® Pine

||||  
☁  
🏠  
☀️\*




**RIB5**  
21 x 141,7 [133,7] mm  
ThermoWood® Pine

||||  
☁  
🏠  
☀️




**KYLE**  
27 x 143,5 [127,5] mm  
ThermoWood® Pine

||||  
☁\*  
🏠  
☀️



**BOGO (OSLO)**  
34 x 143,5 [127,5] mm  
ThermoWood® Pine

||||  
☁  
🏠  
☀️



**FARO (BODO)**  
34 x 186,1 [170] mm  
ThermoWood® Pine

||||  
☁  
🏠  
☀️

\* mits aanpassing naar 15 mm dikte op dunste deel

\* à condition qu'il soit ajusté à une épaisseur de 15 mm au niveau de la partie la plus fine

\* provided it is adjusted to a thickness of 15 mm at the thinnest part.



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | protectedbynature@ldcwood.com  
www.ldcwood.com

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Thermo-D Pine

| Duurzaamheidsklasse 1 / Classe de durabilité 1 / Durability class 1


|||| gevel / bardage / cladding

🏠 interieur / intérieur / interior


☁️ outdoor / extérieur / outdoor

🌳 terras / planches de terrasse / decking

🔥 kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant




**TABY** fijnbezaagd / finement scié / finely sawn  
9,5/20 x 140 (130) mm  
ThermoWood® Pine




**JAMY** fijnbezaagd / finement scié / finely sawn  
11,5/25 x 190 (175) mm  
ThermoWood® Pine



**INTERIOR 1**  
22 x 45 mm  
ThermoWood® Pine



**INTERIOR 2**  
22 x 45 mm  
ThermoWood® Pine



**INTERIOR 3**  
22 x 90 mm  
ThermoWood® Pine



**INTERIOR 4**  
22 x 90 mm  
ThermoWood® Pine



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Thermo-D Pine

| Duurzaamheidsklasse 1 / Classe de durabilité 1 / Durability class 1

|||| gevel / bardage / cladding

☁ outdoor / extérieur / outdoor

🔥 kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant

🏠 interieur / intérieur / interior

🌳 terras / planches de terrasse / decking



## DECKING 1

21 x 145 mm


ThermoWood® Pine



## DECKING 2

27 x 145 mm


ThermoWood® Pine

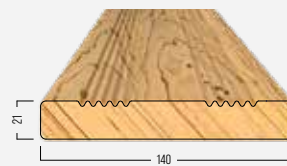

## DECKING 3

21 x 140 mm

ThermoWood® Pine

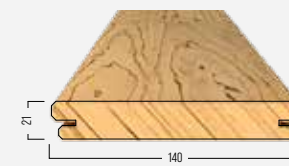

## DECKING 4

21 x 140 mm

ThermoWood® Pine



## DECKING 5

21 x 140 mm

ThermoWood® Pine



LDCWOOD® NV/SA THERMWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Thermo-D Spruce

II Duurzaamheidsklasse 2 / Classe de durabilité 2 / Durability class 2


|||| gevel / bardage / cladding

🏠 interieur / intérieur / interior

☁️ outdoor / extérieur / outdoor

🪵 terras / planches de terrasse / decking

🔥 kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant



**PARA**  
18 x 68 mm  
ThermoWood® Spruce


II

||||

☁️

🏠

🪵



**ALTA**  
18 x 142 (131) mm  
ThermoWood® Spruce

II


🔥

||||

☁️

🏠

🪵



**MORA**  
21 x 142 (131) mm  
ThermoWood® Spruce

II


🔥

||||

☁️

🏠

🪵



**ELSA (KITE)**  
20 x 142 (132) mm  
ThermoWood® Spruce

II


🔥\*

||||

☁️

🏠

🪵



**RIB5**  
21 x 141,7 (133,7) mm  
ThermoWood® Spruce


II

||||

☁️

🏠

🪵



**KYLE**  
27 x 143,5 (127,5) mm  
ThermoWood® Spruce

II

🔥\*

||||

☁️

🏠

🪵



**BOGO (OSLO)**  
34 x 143,5 (127,5) mm  
ThermoWood® Spruce

II

🔥

||||

☁️

🏠

🪵



**FARO (BODO)**  
34 x 186,1 (170) mm  
ThermoWood® Spruce

II

🔥

||||

☁️

🏠

🪵

\* mits aanpassing naar 15 mm dikte op dunste deel

\* à condition qu'il soit ajusté à une épaisseur de 15 mm au niveau de la partie la plus fine

\* provided it is adjusted to a thickness of 15 mm at the thinnest part.



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | protectedbynature@ldcwood.com  
www.ldcwood.com

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Thermo-D Spruce

II Duurzaamheidsklasse 2 / Classe de durabilité 2 / Durability class 2


|||| gevel / bardage / cladding

🏠 interieur / intérieur / interior


☁️ outdoor / extérieur / outdoor

🪵 terras / planches de terrasse / decking

🔥 kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant

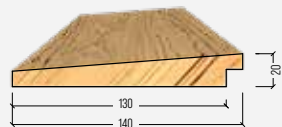


**TABY** fijnbezaagd / finement scié / finely sawn  
9,5/20 x 140 (130) mm  
ThermoWood® Spruce

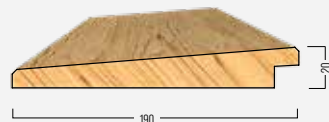


**JAMY** fijnbezaagd / finement scié / finely sawn  
11,5/25 x 190 (175) mm  
ThermoWood® Spruce



**INTERIOR 1**  
22 x 45 mm  
ThermoWood® Spruce



**INTERIOR 2**  
22 x 45 mm  
ThermoWood® Spruce



**INTERIOR 3**  
22 x 90 mm  
ThermoWood® Spruce



**INTERIOR 4**  
22 x 90 mm  
ThermoWood® Spruce



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Ongeschaafd - brut - rough sawn

## Pine

LDCwood® ThermoWood®  
Thermo-D | SF Quality



Breedte  
Largeur  
Width


**100 > 150 mm**  
**175 > 225 mm**

Dikte  
Épaisseur  
Thickness

**25 > 75 mm**  
**25 > 75 mm**

## Spruce

LDCwood® ThermoWood®  
Thermo-D | SF Quality



Breedte  
Largeur  
Width

**100 > 150 mm**  
**175 > 225 mm**

Dikte  
Épaisseur  
Thickness

**22 > 75 mm**  
**22 > 75 mm**

## Radiata pine

LDCwood® ThermoWood®  
Thermo-D | SF Quality



Breedte  
Largeur  
Width

**150 mm**

Dikte  
Épaisseur  
Thickness

**25 > 63 mm**



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.







# SIANIQ

Europa - l'Europe - Europe & Amerika - l'Amérique - America

- Rotbestendig
- Résistant à la pourriture
- Rot resistant
- Milieuvriendelijk
- Respectueux de l'environnement
- Earth-friendly
- Vormvast
- Dimensionnellement stable
- Dimensionally stable



Ash



Poplar



Red Oak

# Thermo-D Ash

II Duurzaamheidsklasse 2 / Classe de durabilité 2 / Durability class 2


|||| gevel / bardage / cladding

☁ outdoor / extérieur / outdoor

🔥 kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant


🏠 interieur / intérieur / interior

☀ terras / planches de terrasse / decking




**ALTA**  
18 x 142 [131] mm  
ThermoWood® Ash

II  
🔥  
||||  
☁  
🏠  
☀




**MORA**  
21 x 142 [131] mm  
ThermoWood® Ash

II  
🔥  
||||  
☁  
🏠  
☀




**ELSA (KITE)**  
20 x 142 [132] mm  
ThermoWood® Ash

II  
🔥\*  
||||  
☁  
🏠  
☀



**RIB5**  
21 x 141,7 [133,7] mm  
ThermoWood® Ash

II  
🔥  
||||  
☁  
🏠  
☀



**KYLE**  
27 x 143,5 [127,5] mm  
ThermoWood® Ash

II  
🔥\*  
||||  
☁  
🏠  
☀

\* mits aanpassing naar 15 mm dikte op dunste deel

\* à condition qu'il soit ajusté à une épaisseur de 15 mm au niveau de la partie la plus fine

\* provided it is adjusted to a thickness of 15 mm at the thinnest part.



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Thermo-D Ash

II Duurzaamheidsklasse 2 / Classe de durabilité 2 / Durability class 2


|||| gevel / bardage / cladding

🏠 interieur / intérieur / interior

☁️ outdoor / extérieur / outdoor

🪵 terras / planches de terrasse / decking


🔥 kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant



II

**INTERIOR 1**  
22 x 45 mm  
ThermoWood® Ash


||||  
☁️  
🏠  
🪵



II

**INTERIOR 2**  
22 x 45 mm  
ThermoWood® Ash


||||  
☁️  
🏠  
🪵



II

**INTERIOR 3**  
22 x 90 mm  
ThermoWood® Ash

||||  
☁️  
🏠  
🪵



II

**INTERIOR 4**  
22 x 90 mm  
ThermoWood® Ash

||||  
☁️  
🏠  
🪵



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Thermo-D Ash

II Duurzaamheidsklasse 2 / Classe de durabilité 2 / Durability class 2


|||| gevel / bardage / cladding

☁ outdoor / extérieur / outdoor

🔥 kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant

🏠 interieur / intérieur / interior


🌳 terras / planches de terrasse / decking



II

**DECKING 1**  
21 x 145 mm  
ThermoWood® Ash


||||  
☁  
🏠  
🌳



II

**DECKING 2**  
27 x 145 mm  
ThermoWood® Ash


||||  
☁  
🏠  
🌳



II

**DECKING 3**  
21 x 140 mm  
ThermoWood® Ash


||||  
☁  
🏠  
🌳



II

**DECKING 4**  
21 x 140 mm  
ThermoWood® Ash

||||  
☁  
🏠  
🌳



II

**DECKING 5**  
21 x 140 mm  
ThermoWood® Ash

||||  
☁  
🏠  
🌳



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Thermo-D Poplar

II Duurzaamheidsklasse 2 / Classe de durabilité 2 / Durability class 2

|||| gevel / bardage / cladding

☁ outdoor / extérieur / outdoor



kan brandvertragend behandeld worden / peut être traité ignifuge / can be treated with fire retardant

🏠 interieur / intérieur / interior

☀ terras / planches de terrasse / decking

**ALTA**  
18 x 142 [131] mm  
ThermoWood® Poplar

Icons: ||, ☁, 🏠, ☀

**MORA**  
21 x 142 [131] mm  
ThermoWood® Poplar

Icons: ||, ☁, 🏠, ☀

**ELSA (KITE)**  
20 x 142 [132] mm  
ThermoWood® Poplar

Icons: ||, ☁\*, 🏠, ☀

**RIB5**  
21 x 141,7 [133,7] mm  
ThermoWood® Poplar

Icons: ||, ☁, 🏠, ☀

**INTERIOR 1**  
22 x 45 mm  
ThermoWood® Poplar

Icons: ||, ☁, 🏠, ☀

**INTERIOR 2**  
22 x 45 mm  
ThermoWood® Poplar

Icons: ||, ☁, 🏠, ☀

**INTERIOR 3**  
22 x 90 mm  
ThermoWood® Poplar

Icons: ||, ☁, 🏠, ☀

**INTERIOR 4**  
22 x 90 mm  
ThermoWood® Poplar

Icons: ||, ☁, 🏠, ☀

\* mits aanpassing naar 15 mm dikte op dunste deel

\* à condition qu'il soit ajusté à une épaisseur de 15 mm au niveau de la partie la plus fine

\* provided it is adjusted to a thickness of 15 mm at the thinnest part.



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | protectedbynature@ldcwood.com  
www.ldcwood.com

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Ongeschaafd - brut - rough sawn

## Ash

LDCwood® ThermoWood®  
Thermo-D | SF Quality



Breedte  
Largeur  
Width


105 > 155 mm

Dikte  
Épaisseur  
Thickness

26 > 52 mm

## Poplar

LDCwood® ThermoWood®  
Thermo-D | SF Quality



Breedte  
Largeur  
Width

155 mm

Dikte  
Épaisseur  
Thickness

26 > 52 mm

## Red Oak

LDCwood® ThermoWood®  
Thermo-D | FAS Quality



Breedte  
Largeur  
Width

155 > 205 mm

Dikte  
Épaisseur  
Thickness

26 mm



LDCWOOD® NV/SA THERMOWOOD®

+32 59 50 55 14 | [protectedbynature@ldcwood.com](mailto:protectedbynature@ldcwood.com)  
[www.ldcwood.com](http://www.ldcwood.com)

This brochure provides purely informative information about the products and services offered by LDCwood®. Without verification or further advice, use of the information provided is entirely at the user's risk. Despite the fact that LDCwood® takes the utmost care to ensure that the information is reliable and up-to-date, this brochure may contain inaccuracies. LDCwood® may change the brochure at its own discretion and at any time. All data illustrated in this brochure (including, but not limited to: text, photos, illustrations, graphic material, (trade) names, logos, goods) are the property of or under licence from LDCwood® and are protected by intellectual property law. Only Belgian law is applicable to disputes relating to this brochure.

# Overview cladding & outdoor

	ALKE		LAGOM		SIANIQ	
	AYOUS	FRAKÉ	PINE	SPRUCE	ASH	POPLAR
ALTA			🌲	🌲	🌲	🌲
BANA	🌲	🌲				
BELO	🌲					
BOGO (OSLO)	🌲		🌲	🌲		
EDEA	🌲	🌲				
ELSA (KITE)	🌲		🌲	🌲	🌲	🌲
FARO (BODO)	🌲		🌲	🌲		
GODO		🌲				
JAMY			🌲	🌲		
KYLE			🌲	🌲	🌲	
MORA	🌲	🌲	🌲	🌲	🌲	🌲
NOLA	🌲					
OLLA	🌲					
PARA	🌲		🌲	🌲		
RIB4	🌲					
RIB5	🌲		🌲	🌲	🌲	🌲
RIB6	🌲					
SKYLINE	🌲	🌲				
STORM 1		🌲				
STORM 2		🌲				
STORM 3		🌲				
TABY			🌲	🌲		
ZAZA	🌲					
WAVES	🌲	🌲				

# Overview interior

	ALKE		LAGOM		SIANIQ	
	AYOUS	FRAKÉ	PINE	SPRUCE	ASH	POPLAR
INTERIOR 1	🌲	🌲	🌲	🌲	🌲	🌲
INTERIOR 2	🌲	🌲	🌲	🌲	🌲	🌲
INTERIOR 3	🌲	🌲	🌲	🌲	🌲	🌲
INTERIOR 4	🌲	🌲	🌲	🌲	🌲	🌲

# Overview decking

	ALKE		LAGOM		SIANIQ	
	AYOUS	FRAKÉ	PINE	SPRUCE	ASH	POPLAR
DECKING 1		🌲	🌲		🌲	
DECKING 2		🌲	🌲		🌲	
DECKING 3		🌲	🌲		🌲	
DECKING 4		🌲	🌲		🌲	
DECKING 5		🌲	🌲		🌲	

# LDCWOOD® THERMOWOOD®

LDCwood® biedt een oplossing voor elke behoefte met een breed assortiment aan houtsoorten en profielen. LDCwood® ThermoWood® kan onder vacuümdruk brandvertragend worden behandeld, voorvergrijsd, geolied, geborsteld en gelakt.

**Ons lidmaatschap bij de International ThermoWood® Association garandeert de hoogste kwaliteit van thermisch gemodificeerd hout. Met hout uit duurzaam beheerde bossen houdt niets je tegen om voor LDCwood® ThermoWood® te kiezen.**

LDCwood® offre une solution pour chaque besoin en proposant une large gamme de types de bois et de modèles. LDCwood® ThermoWood® peut être traité avec un produit ignifuge par pression sous vide, prévieilli, huilé, brossé et verni.


**Notre adhésion à l'Association Internationale ThermoWood® garantit la plus haute qualité du bois réifié thermiquement. Notre bois provient de forêts gérées durablement. Dès lors, LDCwood® ThermoWood® est le choix qui s'impose, quelles que soient les quantités requises.**

LDCwood® provides a solution for every need with a wide range of wood types and patterns. LDCwood® ThermoWood® can be treated with fire retardant under vacuum pressure, pre-aged, oiled, brushed and varnished.

**Our membership in the International ThermoWood® Association guarantees the highest quality of thermally modified timber. With wood from sustainable managed forests there are no boundaries to choose LDCwood® ThermoWood®.**



FSC® (C001899), PEFC (PEFC/07-31-24), BSI ISO 14001 Certified

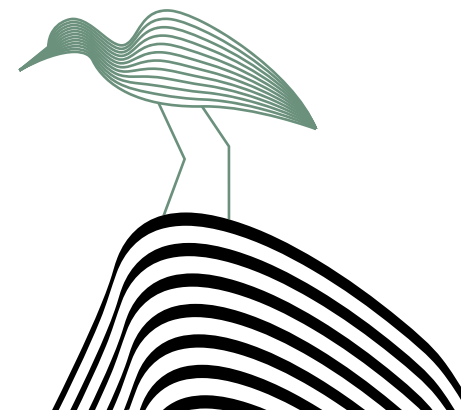



**THERMOWOOD®**

**+32 59 33 99 99**

**protectedbynature@ldcwood.com**

**www.ldcwood.com**



**THERMOWOOD®**

